


# VKDIC - DUAL BLOCKB 2-WAY

## Βάνα Σφαιρική

DUAL BLOCK<sup>B</sup> 2-way ball valve with female ends for solvent welding, metric series

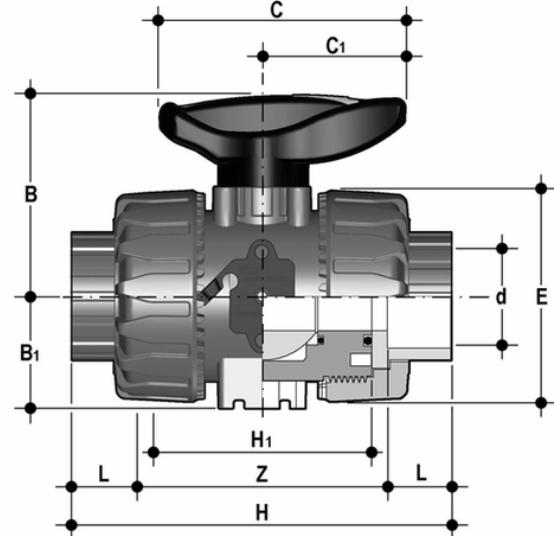

### EPDM

| Κωδικός προϊόντος | tooltiplimage | d  | DN | PN | B    | B[5:1] | C   | C[5:1] | E   | H   | H[5:1] | L  | Z   | g    |
|-------------------|---------------|----|----|----|------|--------|-----|--------|-----|-----|--------|----|-----|------|
| VKDIA016E         | -             | 16 | 10 | 16 | 54   | 29     | 67  | 40     | 54  | 103 | 65     | 14 | 75  | 234  |
| VKDIA020E         | -             | 20 | 15 | 16 | 54   | 29     | 67  | 40     | 54  | 103 | 65     | 16 | 71  | 223  |
| VKDIA025E         | -             | 25 | 20 | 16 | 65   | 34,5   | 85  | 49     | 65  | 115 | 70     | 19 | 77  | 358  |
| VKDIA032E         | -             | 32 | 25 | 16 | 69,5 | 39     | 85  | 49     | 73  | 128 | 78     | 22 | 84  | 476  |
| VKDIA040E         | -             | 40 | 32 | 16 | 82,5 | 46     | 108 | 64     | 86  | 146 | 88     | 26 | 94  | 753  |
| VKDIA050E         | -             | 50 | 40 | 16 | 89   | 52     | 108 | 64     | 98  | 164 | 93     | 31 | 102 | 1007 |
| VKDIA063E         | -             | 63 | 50 | 16 | 108  | 62     | 134 | 76     | 122 | 199 | 111    | 38 | 123 | 1717 |

### FKM

| Κωδικός προϊόντος | tooltiplimage | d  | DN | PN | B    | B[5:1] | C   | C[5:1] | E   | H   | H[5:1] | L  | Z   | g    |
|-------------------|---------------|----|----|----|------|--------|-----|--------|-----|-----|--------|----|-----|------|
| VKDIA016F         | -             | 16 | 10 | 16 | 54   | 29     | 67  | 40     | 54  | 103 | 65     | 14 | 75  | 234  |
| VKDIA020F         | -             | 20 | 15 | 16 | 54   | 29     | 67  | 40     | 54  | 103 | 65     | 16 | 71  | 223  |
| VKDIA025F         | -             | 25 | 20 | 16 | 65   | 34,5   | 85  | 49     | 65  | 115 | 70     | 19 | 77  | 358  |
| VKDIA032F         | -             | 32 | 25 | 16 | 69,5 | 39     | 85  | 49     | 73  | 128 | 78     | 22 | 84  | 476  |
| VKDIA040F         | -             | 40 | 32 | 16 | 82,5 | 46     | 108 | 64     | 86  | 146 | 88     | 26 | 94  | 753  |
| VKDIA050F         | -             | 50 | 40 | 16 | 89   | 52     | 108 | 64     | 98  | 164 | 93     | 31 | 102 | 1007 |
| VKDIA063F         | -             | 63 | 50 | 16 | 108  | 62     | 134 | 76     | 122 | 199 | 111    | 38 | 123 | 1717 |

# VKDIC - DUAL BLOCKB 2-WAY

## Βάνα Σφαιρική

- Ergonomic HIPVC handle equipped with **removable tool to adjust the ball seat carrier**.
- **Handle lock 0B° - 90B° SHKD** (available as an accessory) ergonomically operable during service and padlockable
- Robust **integrated bracket for valve anchoring**, for easy and quick automation even after valve installation on the system via the Power Quick module (optional)
- **DUAL BLOCKB** patented lock system that ensures union nut tightening hold even in severe conditions such as vibrations or heat dilation
- Machined high surface finish ball that guarantees a smooth operation and increased reliability
- Connection system for solvent weld, threaded and flanged joints
- Patented **SEAT STOPB** ball carrier system that lets you micro-adjust ball seats and minimise the axial force effect
- Easy radial dismounting allowing quick replacement of O-rings and ball seats without any need for tools
- **PN16 True Union valve body** made for rigid PVC-U injection moulding equipped with built-in bores for actuation. ISO 9393 compliant test requisites
- Option of dismounting downstream pipes with the valve in the closed position
- Floating **full bore ball** with high surface finish
- **Integrated bracket** for valve anchoring
- Ball seat carriers can be adjusted using the **Easytorque adjustment kit**
- Possibility to have handle with integrated LSQT limit micro switch, even as a retrofit in existing installations