


ABMS

Ηλεκτροσύνδεσμος υπό γωνία (αντιστάσεις ενός άκρου)

for change of direction in HDPE sewage connection pipes and connection to sewage saddles ASA-TL

Little space required thanks to compact design as well as angle spacings of 15°, 30°, 45° facilitate a comfortable pipeline routing. Coupler end with exposed heating coil for optimal heat transfer. Pipe spigots specifically suited for direct fusion into the FRIAFIT sewage saddle ASA TL. Angles of 60°, 90° etc. can be produced by using ABM repeatedly. The smooth, hydraulically optimised internal contour offers a level passage when pipes SDR 17/17.6 are used. The bright surface facilitates an optimal view during camera inspection. With pin indicator for visually checking fusion.

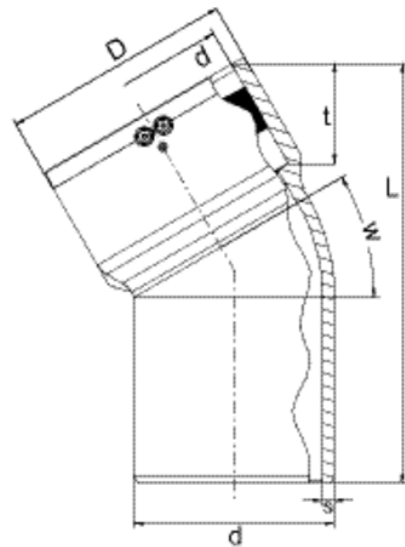

PE 100

Maximum working pressure 2,5 bar

Κωδικός προϊόντος	w	d	BX	PU	D	L	t	s	Weight kg
681103	15°	160	6	48	185	286	92	9,5	1,510
681104	30°	160	6	48	185	329	92	9,5	1,680
681105	45°	160	6	48	185	325	92	9,5	1,730

ABMS

Ηλεκτροσύνδεσμος υπό γωνία (αντιστάσεις ενός άκρου)

Sewage pipe systems are high-value assets of a value which has to be maintained for a long time. Increasing demands on the public sewage system require materials which meet these criteria. HDPE sewage pipes have been fused for many years with the FRIAFIT HDPE sewage system tightly, frictionlocked and root-proof.

Areas of Application

The FRIAFIT elbows ABM and ABMS d 160/DN 150 are used for change of direction in sewage and combined sewage water connection lines. The types ABM (coupler/coupler) or ABMS (coupler/pipe spigot) and the angle spacings 15°, 30° and 45° facilitate a comfortable piping configuration. Angles of 60°, 90° etc. can be produced by using multiple elbows. The FRIAFIT elbow ABMS is specifically suited for direct fusion into the FRIAFIT sewage saddle ASA-TL. The FRIAFIT elbows ABM and ABMS have a smooth, hydraulically optimised internal contour for sewage water draining and offer a level passage when used with

pipes SDR 17/17.6. The bright surface facilitates an optimal view during camera inspection. The material used is stabilised against UV radiation.

Notes on processing

The connection of the pipes and fittings with FRIAFIT elbows by FRIAFIT fusion is leak-tight and friction-locked. The PE fusion ends of the pipe or fitting are prepared according to the general installation

requirements (see assembly instructions for the FRIAFIT sewage system) (remove oxide layer/clean). For push-fit connections at the pipe spigot of the FRIAFIT elbow ABMS, insertion depths and wall

thickness differences, if any, are to be considered.

Good reasons for the FRIAFIT elbows ABM / ABMS

- Little space required thanks to compact design
- Reduction of the installation time thanks to integrated fusion couplers
- Large coupler depths for good guiding of the pipe or pipe spigot (no fixing devices required)
- Leak-tight, friction-locked and root-proof connection
- Exposed, fixed heating coil for direct heat transfer to the pipe
- Extra-broad fusion zones
- Extra-large insertion depths
- Short fusion times, short cooling down times
- Fusion indicator for visual control of fusion
- Extra-long cold zones before and after the fusion area
- Barcode for fully automatic fusion with HDPE pipes from SDR 33 to SDR 17, taking into consideration the ambient temperature (temperature compensation)
- Bright component part interior surface for continuous camera inspection

ABMS

Ηλεκτροσύνδεσμος υπό γωνία (αντιστάσεις ενός άκρου)

- Hydraulically optimised internal contour through curved form
- Level when using SDR 17/17.6 connecting pipes, no drain obstructions
- Flexible use thanks to types ABM (coupler/coupler) or ABMS (coupler/pipe spigot)
- Elbow angle 15°, 30°, and 45°
- Other elbow angles can be produced by using multiple elbows or combining elbows