


FOR QRV AND QPV

Steel core backing ring, PP/FRP coated, according to EN/ISO/DIN for stubs QRV and QPV. Drilling: PN 10/16 up to DN 150; PN 10 from DN 200.

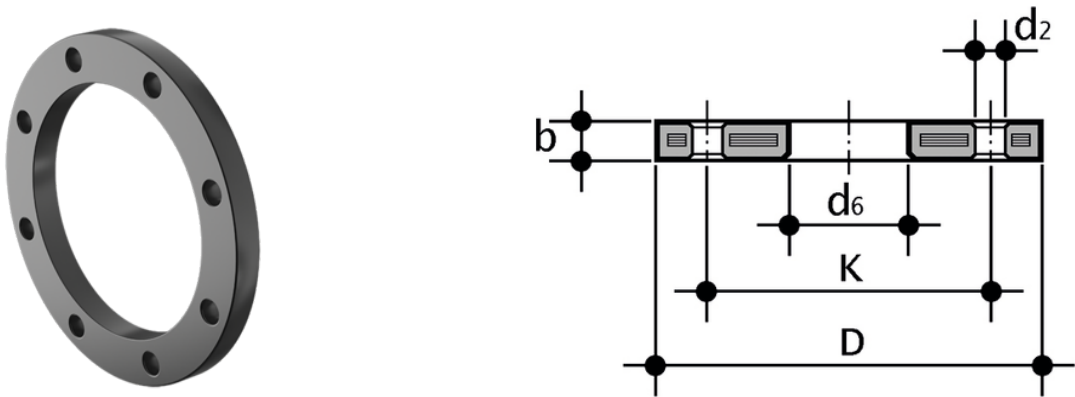

| Reference      | tooltipImage | product.detail.attribute.textBelowTableText                             | system                        | Category | d   | DN  | PMA (bar) | b  | D   | d2 | d[5 |
|----------------|--------------|-------------------------------------------------------------------------|-------------------------------|----------|-----|-----|-----------|----|-----|----|-----|
| SWODBD140DN125 | -            | *PMA maximum admissible working pressure<br>**nominal tightening torque | Special parts and accessories | Flanges  | 140 | 125 | 16        | 24 | 252 | 18 | 166 |
| SWODBD225DN200 | -            | *PMA maximum admissible working pressure<br>**nominal tightening torque | Special parts and accessories | Flanges  | 225 | 200 | 16        | 27 | 340 | 22 | 248 |
| SWODBD280DN250 | -            | *PMA maximum admissible working pressure<br>**nominal tightening torque | Special parts and accessories | Flanges  | 280 | 250 | 16        | 30 | 395 | 22 | 309 |
| SWODBD315DN300 | -            | *PMA maximum admissible working pressure<br>**nominal tightening torque | Special parts and accessories | Flanges  | 315 | 300 | 16        | 34 | 445 | 22 | 349 |