


CMFV – Compact diaphragm valve DN 12:15

Compact diaphragm valve with BSP threaded female ends.

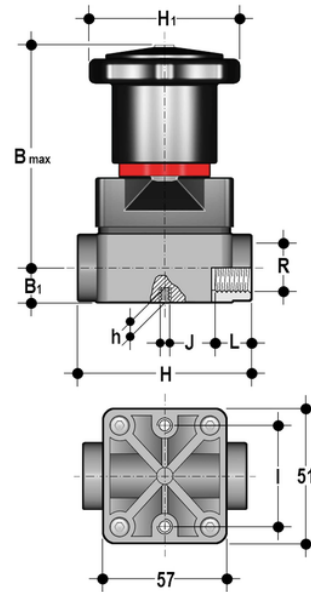

EPDM

Reference	tooltiplImage	system	Category	family	series	R	DN	PN	B _{max}	B[5:1]	H	H[5:1]	h	l	J	L	g
CMFV038E	-	PVC-U system	Manual valves	Diaphragm valves	CM DN 12÷15	3/8"	12	6	86	15	75	58,5	8	35	M5	11,5	270
CMFV012E	-	PVC-U system	Manual valves	Diaphragm valves	CM DN 12÷15	1/2"	15	6	86	15	75	58,5	8	35	M5	15	270

FKM

Reference	tooltiplImage	system	Category	family	series	R	DN	PN	B _{max}	B[5:1]	H	H[5:1]	h	l	J	L	g
CMFV038F	-	PVC-U system	Manual valves	Diaphragm valves	CM DN 12÷15	3/8"	12	6	86	15	75	58,5	8	35	M5	11,5	270
CMFV012F	-	PVC-U system	Manual valves	Diaphragm valves	CM DN 12÷15	1/2"	15	6	86	15	75	58,5	8	35	M5	15	270

PTFE

Reference	tooltiplImage	system	Category	family	series	R	DN	PN	B _{max}	B[5:1]	H	H[5:1]	h	l	J	L	g
CMFV038P	-	PVC-U system	Manual valves	Diaphragm valves	CM DN 12÷15	3/8"	12	6	86	15	75	58,5	8	35	M5	11,5	270



CMFV – Compact diaphragm valve DN 12:15

Reference	tooltiplimage	system	Category	family	series	R	DN	PN	B _{max}	B[5:1]	H	H[5:1]	h	l	J	L	g
CMFV012P	-	PVC-U system	Manual valves	Diaphragm valves	CM DN 12÷15	1/2"	15	6	86	15	75	58,5	8	35	M5	15	270



CMFV – Compact diaphragm valve DN 12:15

- **Handwheel in PA-GR, completely sealed**, high mechanical strength with ergonomic grip for optimum manageability
- **Integrated adjustable torque limiter** designed to prevent excessive compression of the diaphragm and always guarantee a minimum fluid flow
- **Optical position indicator** supplied as standard
- **Bonnet in PA-GR with STAINLESS steel nuts** fully protected by plastic plugs to eliminate zones where impurities may accumulate. Internal circular and symmetrical diaphragm sealing area
- **STAINLESS steel bolts**, can also be inserted from above
- **Threaded metal inserts** for anchoring the valve
- Connection system for solvent weld and threaded joints
- Extremely compact construction
- **Internal operating components in metal totally isolated from the conveyed fluid**
- Valve stem in STAINLESS steel
- **Compressor with floating diaphragm support**
- Easy to replace diaphragm seal
- Corrosion-proof internal components
- **CDSA** (Circular Diaphragm Sealing Angle) system offering the following advantages:
 - uniform distribution of shutter pressure on the diaphragm seal
 - reduction in the tightening torque of the crews fixing the actuator to the valve body
 - reduced mechanical stress on all valve components (actuator, body and diaphragm)
 - easy to clean valve interior
 - low risk of the accumulation of eposits, contamination or damage to the diaphragm due to crystallisation
 - operating torque reduction